



APPLICATION FOR IEC REPORT

On Behalf of

JAKIN TECHNOLOGY LIMITED

ACTATEK A-Series

Model No.: See model list

Prepared for: JAKIN TECHNOLOGY LIMITED
Address: Unit 913-914,9/F., Worldwide industrial centre, 43-47 Shan Mei Street, Fotan, Shatin, N.T., Hong Kong

Prepared by: Shenzhen Alpha Product Testing Co., Ltd.
Address: Building i, No.2, Lixin Road, Fuyong Street, Bao'an District, 518103, Shenzhen, Guangdong, China.

Date of Test: August 22, 2023
Date of Report: August 23, 2023
Report Number: A2307074-C01-R01
Version Number: V0

TEST REPORT

IEC 62262

Degress of protection provided by enclosure for electrical external mechanical impacts (IK code)

Report Reference No.....: A2307074-C01-R01

Tested by (name + signature): Jace Li

Approved by (name + signature).....: Marco Fu

Date of issue.....: August 23, 2023

Testing Laboratory: Shenzhen Alpha Product Testing Co., Ltd.

Address: Building i, No.2, Lixin Road, Fuyong Street, Bao'an District,
518103, Shenzhen, Guangdong, China.

Testing location/procedure: TL [☒] CBTL [] SMT [] TMP []

Address: Same as above

Applicant's name: JAKIN TECHNOLOGY LIMITED

Address: Unit 913-914,9/F., Worldwide industrial centre, 43-47 Shan Mei
Street, Fotan, Shatin, N.T., Hong Kong

Test specification:

Standard: IEC 62262: 2002+AMD1:2021

Test procedure: Type test

Non-standard test method: N/A

Test item description: ACTATEK A-Series

Model/Type reference: See model list

Model different: All models have the same structure, except for the model name due
to the sales area.

Trademark.....: ACTATEK

Manufacturer.....: JAKIN TECHNOLOGY LIMITED

Address: Unit 913-914,9/F., Worldwide industrial centre, 43-47 Shan Mei
Street, Fotan, Shatin, N.T., Hong Kong

Rating(s).....: N/A




Li
Fu

Equipment mobility	No mobility
Connection to the mains.....	Not directly connected to the mains
Operating condition	Continuous
Pollution degree.....	<input type="checkbox"/> PD 1 <input checked="" type="checkbox"/> PD 2 <input type="checkbox"/> PD 3
Degree of protection	IK10
Accessories and detachable parts included in the evaluation	
Options	
Possible test case verdicts:	
Test case does not apply to the test object : N/A(Not Applicable)	
Test object does meet the requirement : P(Pass)	
Test object does not meet the requirement : F(Fail)	
Testing	
Date of receipt of test item : August 17, 2023	
Date (s) of performance of tests : August 22, 2023	
General remarks:	
<p>The test results presented in this report relate only to the object tested.</p> <p>This report shall not be reproduced, except in full, without the written approval of the issuing testing laboratory.</p> <p>"(see remark #)" refers to a remark appended to the report.</p> <p>"(see Annex #)" refers to an annex appended to the report.</p> <p>"(see Form A.#)" refers to a table appended to the report.</p> <p>Throughout this report a comma (point) is used as the decimal separator.</p> <p>Decision rules for the conclusion of this test report: decision by actual test data without considering measurement uncertainty.</p>	
Summary of the test report	
The complete report including following parts:	
1. All clauses of IEC 62262: 2002+AMD1:2021	
2. Appendix 1: Equipment List.	
3. Appendix 2: Photo documentation.	
Note: The test was performed on the model A-1K-BC-C, the main test model can cover other model.	

Model list

A-1K-BC-C	A-1K-C-I-P	A-1K-C-P	A-1K-CP	A-1K-FA	A-1K-FA-3
A-1K-FA-4	A-1K-FA-BC	A-1K-FA-FBC	A-1K-FA-FHI	A-1K-FA-FHIA	A-1K-FA-FHP
A-1K-FA-FHP-W-4	A-1K-FA-FHP-W-4-I	A-1K-FA-FLI	A-1K-FA-FLI-3	A-1K-FA-FLI-4	A-1K-FA-FLI-I
A-1K-FA-FLI-P	A-1K-FA-FLI-W	A-1K-FA-FLI-W-P	A-1K-FA-FLI-W	A-1K-FA-FLI-WI3	A-1K-FA-FSE
A-1K-FA-FSE-I	A-1K-FA-FSE-P	A-1K-FA-FSE-W	A-1K-FA-FSE-W-4	A-1K-FA-FSE-W-P	A-1K-FA-FSE-W4-P
A-1K-FA-FSE-WI	A-1K-FA-FSM	A-1K-FA-FSM-P	A-1K-FA-FSM-W	A-1K-FA-FSM-WI4	A-1K-FA-FSMA
A-1K-FA-FSMA-4	A-1K-FA-FSMA-P	A-1K-FA-FSMA-W	A-1K-FA-FSMA-W3	A-1K-FA-FSMA-WI4	A-1K-FA-FSMA-WI4-P
A-1K-FA-FSMA-WIP	A-1K-FA-FSMA-WP	A-1K-FA-FST	A-1K-FA-FST-P	A-1K-FA-FSTA	A-1K-FA-FSTA-W
A-1K-FA-FSTA-WI	A-1K-FA-FSTA-WI-P	A-1K-FA-FSTA-WI4-P	A-1K-FA-FSXA-WI4	A-1K-FA-FSXA-WI4P	A-1K-FA-HI
A-1K-FA-HIA	A-1K-FA-HP	A-1K-FA-HP-4	A-1K-FA-HP-P-4	A-1K-FA-M2	A-1K-FA-P
A-1K-FA-SE	A-1K-FA-SE-I-P	A-1K-FA-SE-P	A-1K-FA-SE-W-P	A-1K-FA-SIR-WI4	A-1K-FA-SM
A-1K-FA-SM-I	A-1K-FA-SM-I3	A-1K-FA-SM-W	A-1K-FA-SM-W-P	A-1K-FA-SMA	A-1K-FA-SMA-W
A-1K-FA-STA	A-1K-FA-STA-W	A-1K-FA-STA-W-P	A-1K-FA-W	A-1K-FA-W-P	A-1K-FA-W4
A-1K-FA-WI	A-1K-FD-STA-C	A-1K-FD-STA-W4-C-P	A-1K-FHI	A-1K-FHI-P	A-1K-FHIA
A-1K-FHIA-C	A-1K-FHP	A-1K-FHP-C	A-1K-FLI	A-1K-FLI-3	A-1K-FLI-4
A-1K-FLI-C	A-1K-FLI-C-4	A-1K-FLI-C-P	A-1K-FLI-C-W	A-1K-FLI-P	A-1K-FLI-W
A-1K-FM2	A-1K-FM2-C-W	A-1K-FM2-W-P	A-1K-FSE	A-1K-FSE-C	A-1K-FSE-C-4
A-1K-FSE-C-W	A-1K-FSE-W	A-1K-FSE-W-P	A-1K-FSE-W4	A-1K-FSIR	A-1K-FSM
A-1K-FSM-C	A-1K-FSM-C-I-P	A-1K-FSM-C-P	A-1K-FSM-C-P-W	A-1K-FSM-C-W	A-1K-FSM-P
A-1K-FSMA	A-1K-FSMA-C	A-1K-FSMA-C-W	A-1K-FSMA-P	A-1K-FSMA-W-P	A-1K-FST-4
A-1K-FSTA	A-1K-FSTA-C	A-1K-FSVA	A-1K-HIA	A-1K-HP	A-1K-HP-4
A-1K-HP-C-W	A-1K-M2	A-1K-P	A-1K-P-C	A-1K-P-C-4	A-1K-P-SIR-W
A-1K-P-SMA	A-1K-P-W-P	A-1K-Q	A-1K-Q-P	A-1K-SE	A-1K-SE-4
A-1K-SE-C	A-1K-SE-P	A-1K-SE-W-P	A-1K-SIR	A-1K-SIR-4	A-1K-SIR-C
A-1K-SIR-C-W	A-1K-SIR-W	A-1K-SIR-W-4	A-1K-SM	A-1K-SM-4	A-1K-SM-C
A-1K-SM-C-W	A-1K-SM-C-W-P	A-1K-SM-W	A-1K-SM-W-4	A-1K-SMA	A-1K-SMA-C
A-1K-SMA-I	A-1K-SMA-P	A-1K-ST	A-1K-ST-C	A-1K-STA	A-1K-STA-C
A-1K-SU	A-1K-SVA	A-1K-SVA-P	A-1K-SX-C	A-1K-SXA	A-1K-SXA-P
A-1K-SYA	A-1K-SYA-C	A-10-SM-C-P	A-3K-FA	A-3K-FA-FHIA-P	A-3K-FA-FHIA-WI-P
A-3K-FA-FHP	A-3K-FA-FHP-W-4-I-P	A-3K-FA-FLI	A-3K-FA-FLI-4	A-3K-FA-FLI-WI	A-3K-FA-FSE
A-3K-FA-FSE-P	A-3K-FA-FSM	A-3K-FA-FSMA	A-3K-FA-FSMA-P	A-3K-FA-FSMA-W	A-3K-FA-FSMA-W-P
A-3K-FA-FSTA-WI-P	A-3K-FA-FSXA-P	A-3K-FA-HI	A-3K-FA-HI-P	A-3K-FA-HIA	A-3K-FA-HIA-P
A-3K-FA-P	A-3K-FA-SE	A-3K-FA-SMA	A-3K-FA-SMA-W	A-3K-FA-STA	A-3K-FA-STA-P
A-3K-FA-STA-W-P	A-3K-FA-W	A-3K-FA-WI	A-3K-FHIA-C	A-3K-FHP	A-3K-FHP-C

A-3K-FHP-C-P	A-3K-FLI	A-3K-FLI-C	A-3K-FLI-C-3-W	A-3K-FLI-C-P	A-3K-FLI-C-W
A-3K-FLI-P	A-3K-FSE	A-3K-FSE-C	A-3K-FSE-P	A-3K-FSHP-C	A-3K-FSM
A-3K-FSM-C-P	A-3K-FSMA	A-3K-FSMA-C-P	A-3K-FSTA-C	A-3K-FSXA-P	A-3K-HP
A-3K-M2	A-3K-SE	A-3K-SE-4	A-3K-SMA	A-5K-FA-FLI	A-5K-FA-FSE-P
A-5K-FA-FSM-P	A-5K-FA-FSMA	A-5K-FA-FSMA-P	A-5K-FA-SE	A-5K-FA-SM	A-5K-FA-SMA
A-5K-FA-SMA-W	A-5K-FA-STA	A-5K-FHIA	A-5K-FHIA-C	A-5K-FHIA-C-P	A-5K-FHIA-P
A-5K-FHP	A-5K-FHP-C	A-5K-FHP-C-P	A-5K-FHP-P	A-5K-FLI	A-5K-FSE
A-5K-FSM	A-5K-FSMA	A-5K-FSMA-C	A-5K-FSMA-C-P	A-5K-FSMA-P	A-5K-FSTA-C
A-5K-HP	A-5K-SE	A-5K-SMA-C	A-5K-SMA-C-P	A-10K-FA-BC	A-10K-FA-FLI
A-10K-FA-FSE	A-10K-FA-FSE-P	A-10K-FA-FSM	A-10K-FA-FSM-P	A-10K-FA-FSMA	A-10K-FA-FSMA-3
A-10K-FA-FSMA-P	A-10K-FA-FSMA-W	A-10K-FA-FST-P	A-10K-FA-SE-W	A-10K-FA-SE-W3	A-10K-FA-SMA
A-10K-FA-SMA-W	A-10K-FHP-C	A-10K-FLI-C	A-10K-FSE	A-10K-FSE-C	A-10K-FSM
A-10K-FSM-C	A-10K-FSM-C-P	A-10K-FSMA-P	A-10K-SIR	A-10K-SMA	A-10K-STA
A-15K-FA-FSM	A-15K-FA-FSMA	A-15K-FSMA	A-20K-C-P	A-20K-FA-3-P	A-20K-FA-STA-W
A-20K-FLI-C-P	A-20K-SE-P	A-30K-FA-FSMA	A-30K-FA-FSMA-3	A-30K-FA-FSMA-4	A-30K-FA-FSMA-W
A-30K-FA-FSM	A-30K-FSMA	A-30K-SM	A-50K-FA-FSMA-3	A-50K-FA-FSMA-W	A-50K-FA-FSTA
A-50K-FHIA-C	A-50K-FM2	A-200K-FA-FSTA-P	A-200K-FSE	A-300K-M2	A-FA-FSE-CASE
A-FA-FSTA-WI-CASE	A-FA-FSTA-WI-P-DEMO	A-FA-FSTA-WI4-P-CASE	A-100K-FA-FSE	A-100K-FA-FSM	A-100K-FA-FSMA
A-100K-FSE	A-100K-FSMA	A-100K-FSMA-4	A-100K-FSMA-C	A-100K-FSMA-C-4	A-100K-FSMA-C-W
A-100K-FSMA-W	/	/	/	/	/

IEC 62262			
Clause	Requirement + Test	Result - Remark	Verdict
4	Designations		P
	The degree of protection provided by an enclosure against impact is indicated by the IK code in the following way.		P
4.1	Arrangement of the IK code 	IK10	P
	Codes letters (international mechanical protection)		P
	Characteristic group numeral (00 to 10)		P
4.2	Characteristic group numerals of the IK code and their meanings	See table1 of IEC 62262, IK10 Impact energy: 20J	P
	Each characteristic group numeral, represents an impact energy value as shown in table 1.	See table 1	P
4.3	Application of the IK code		P
	In general the degree of protection applies to the complete enclosure. If part of the enclosure have differing degrees of protection, the latter shall be separately indicated.		P
4.4	Marking		P
	In case where the relevant product committee decides that marking of the IK-code shall be required, the marking requirement shall be detailed in the relevant product standard.	IK10	P
	Where appropriate, such a standard should also specify the method of marking which is to be used when;		P
	--one part of an enclosure has different degree of protection to that of another part of the same enclosure;		P
	--the mounting position has an influence on the degree of protection.		P
5	General requirements for tests		P
5.1	Atmospheric conditions for tests		P
	Unless otherwise specified in the relevant product standard, the test shall be carried out under the standard atmospheric conditions for tests described in IEC 60068-1 as:		P
	Temperature range 15°C to 35°C	24.2°C	P
	Air pressure 86 kPa to 106 kPa(860 mbar to 1060 mbar)	101 kPa	P
	When the altitude at which the test is performed is higher than 2000m the height of fall shall be adjusted where necessary to result in the specified impact energy.		N
5.2	Enclosure under test		P

IEC 62262			
Clause	Requirement + Test	Result - Remark	Verdict
	Each enclosure under test shall be in a clean and new condition, complete with all their parts in place unless otherwise specified in the relevant product standard.		P
5.3	Specification to be given in the relevant product standard.		P
	The relevant product standard shall specify;		P
	--the definition of "enclosure" as it applies to the particular type of equipment;		P
	--the test equipment(e.g.pendulum hammer, spring hammer or vertical hammer, see Clause7);		P
	--the number of samples to be tested;	1 pc	P
	--the conditions for mounting, assembling and positioning the samples, e.g. by the use of an artificial surface (ceiling, floor or wall), in order to stimulate intended service conditions as far as possible;		P
	--the pre-conditioning, if any, which is to be used;		N
	--whether to be tested energized;	No energized	N
	--whether to be tested with any moving parts in motion;	No moving parts	N
	--the number of impacts and their points of applications (see 6.4).		P
	In the absence of such specifications in the relevant product standard, conditions of this standard shall apply.		P
6	Test to verify the protection against mechanical impacts		P
6.1	The tests specified in this standard are type tests.		P
6.2	In order to verify the protection against mechanical impacts blows shall be applied to the enclosure to be tested. The device to be used for this test are described in Clause 7.		P
6.3	During the test the enclosure shall be mounted, according to the manufacturer in instructions for use, on a rigid support. A support is considered to be sufficiently rigid if its displacement is less than or equal to 0,1 mm under the effect of an impact directly applied and whose energy corresponds to the degree of protection. Alternative mounting and support, suitable for the product, may be specified in the relevant product standard.	Displacement is less than or equal to 0.1mm	P
6.4	The number of impacts shall be five on each exposed face unless otherwise specified in the relevant product standard. The impacts shall be evenly distributed on the faces of the enclosure(s) under test. In no case shall more than three impacts be applied in the surroundings of the same point of the enclosure. The relevant product standard shall specify the points of application of impacts.	5 point in surface, 5 times	P

IEC 62262			
Clause	Requirement + Test	Result - Remark	Verdict
6.5	Test evaluation		P
	The relevant product standard shall specify the criteria upon which the acceptance or rejection of the enclosure is to based on particularly;		P
	--admissible damages;	Damage	P
	--verification certeria relative to the continuity of the safety and reliability of the equipment.	No broken	P
7	Test apparatus		P
	The test shall be done by using one of the test apparatus as described in IEC 60068-2-75		N

Table 1 of IEC 62262-2002:**Table 1- Relation between IK code and impact energy**

IKcode	IK00	IK01	IK02	IK03	IK04	IK05	IK06	IK07	IK08	IK09	IK10
Impact energy J	a	0.14	0.2	0.35	0.5	0.7	1	2	5	10	20
Not protected according to this standard											

NOTE 1 When higher impact energy is required the value of 50 J is recommended.

NOTE 2 A characteristic group numeral of two figures has been chosen to avoid confusion with some former national standards which used a single numeral for a specific impact energy.

Table 2 of IEC 60068-2-75:**Table 2- Height of fall**

Energy (J)	0.14	0.2		(0.3)	0.35	(0.4)	0.5		0.7	1	2	5	10	20	50
Equivalent mass (kg)	0.25	(0.2)	0.25	(0.2)	0.25	(0.2)	(0.2)	0.25	0.25	0.25	0.5	1.7	5	5	10
Height of fall mm \pm 1%	56	(100)	80	(150)	140	(200)	(250)	200	280	400	400	300	200	400	500

NOTES

1 See note in 3.2.2.

2 In this part of IEC 60068, the energy, J, is calculated taking the standard acceleration due to the earth's Gravity(g_n), rounded up to the nearest whole number, that is 10m/s².

Appendix 1
Equipment List

No.	Equipment	Manufacturer	Model No.	Serial No.	Calibration date	Calibration due date
Aa-SE252	IK Shock tester	ANGUI TESTING	AGCKCJ	1808132043	2023.07.25	2024.07.24

Appendix 2
Photo documentation

Photo 1

View:
Sample characteristics

- ☒ front
☐ rear
☐ right side
☐ left side
☐ top
☐ bottom
☐ internal

**Photo 2**

View:

- ☐ front
☒ rear
☐ right side
☐ left side
☐ top
☐ bottom
☐ internal

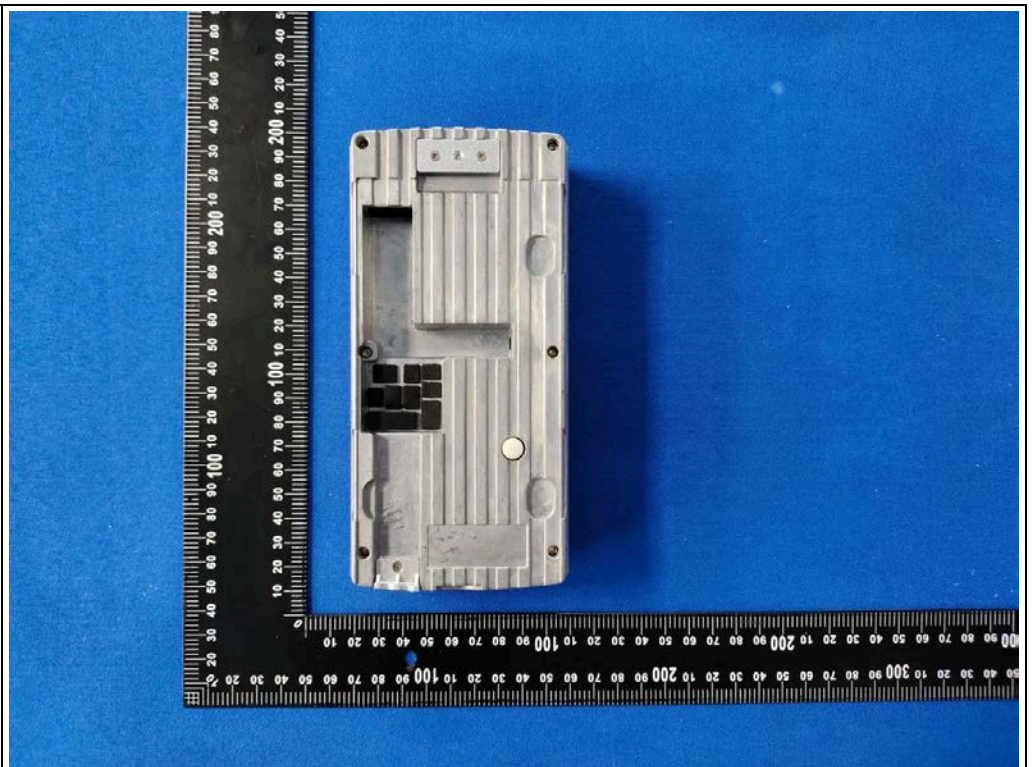
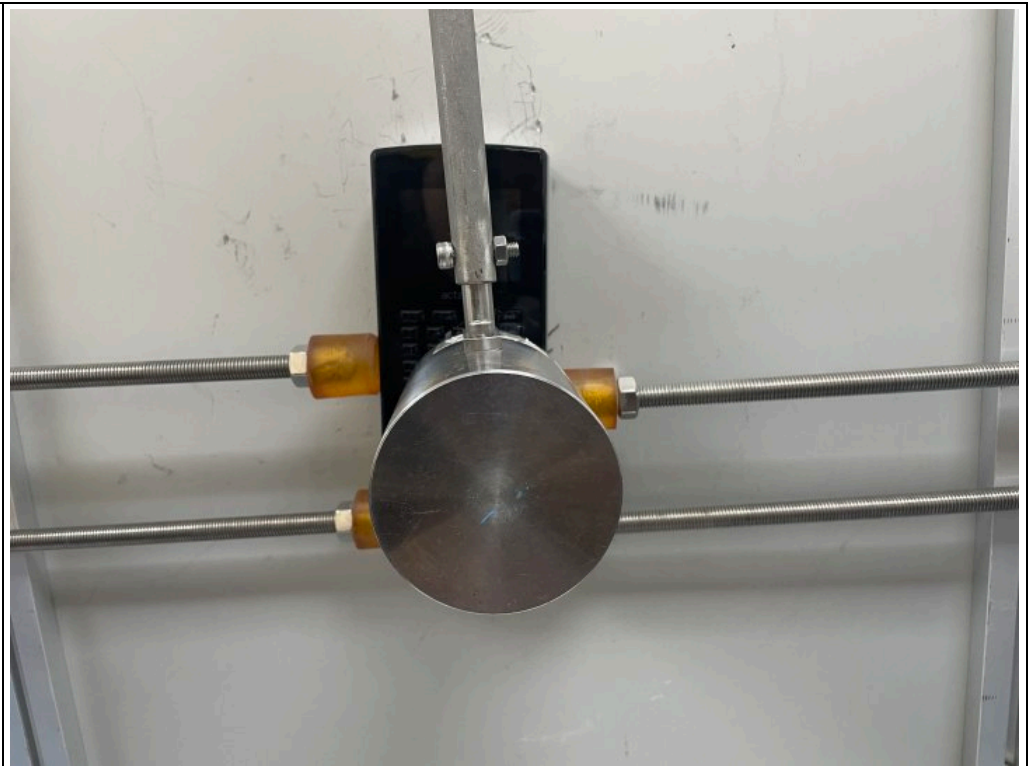


Photo documentation**Photo 3**

View:
Testing

- ☒ front
☐ rear
☐ right side
☐ left side
☐ top
☐ bottom
☐ internal

**Photo 4**

View:
After test

- ☒ front
☐ rear
☐ right side
☐ left side
☐ top
☐ bottom
☐ internal



---End of report---